



Model: **V**series

- LCD speed display, r/min, no backlight
- Timer built-in, Cycle timer standard or Countdown optional
- Optional external control: Stop/Level/Pulse/4~20mA
- PP head standard, Optional PVC/PTFE/Stainless
- Electromagnet driven dosing pump

V T 06005 PH 1 A 6 0 0 0

Accessory

0: Standard
2: Optional

Voltage

0: AC220V 50/60Hz
1: AC110V 50/60Hz
2: DC24V

Valve spring

0: None 1: Yes

Hose

6: Hose, 4×6mm
A: Hose, 7.5×10mm

Contact

A: None R: Remote start/stop
L: Level E: Contact output M: Run monitor

Seal

1: EPDM 2: FKM
3: NBR 4: FFKM

Pump head

PH: PP by molding PM: PP by machining
VM: PVC by machining FM: PTFE SS: Stainless

Head code

Capability

Ext. control


D: Countdown P: Pulse signal A: Analog signal
T: Cycle timer

Series name

V series

Model	Flow L/h	Pressure Bar	Speed r/min	Suction m	Power W	Weight KG	Hose mm	Port mm	Voltage V
00508	0.48	8.2	90	1.2	12	2.9	4×6	G1/2"	AC220 AC110 DC24
01008	1.08	8.2	90	1.2	12				
02008	2.16	8.2	120	1.5	12				
03008	3.12	7.6	120	1.5	12				
04006	3.60	6.8	120	1.5	12				
05006	5.04	6.2	160	1.5	16				
06005	6.00	4.8	160	1.5	16				
08004	8.16	3.8	160	1.5	16				
09003	9.00	3.5	160	1.5	24				
10004	10.20	3.2	160	1.5	24				
12003	12.48	2.8	180	1.5	30				
15002	15.20	1.8	180	1.5	30				
20001	20.00	1.0	180	1.5	30				

Material	Head						Valve						Seal						Body						Case						Diaphragm						Head						Code					
	Ball						Pads						EPDM						PP						PP						PTFE						PP						PH1					
	ZrO2						PTFE						NBR						PP						PP						PTFE						PP						PH3					
	ZrO2						PTFE						FKM						PVC						PVC						PTFE						PVC						VM2					
	SiC						PTFE						FFKM						Stainless						PVDF						PTFE						Stainless						FM4					
	SiC						PTFE						FFKM						Stainless						Stainless						PTFE						SS4											

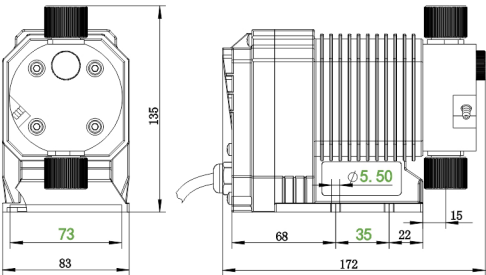

Accessories

